


USB TYPE C AND USB 3.1 GEN 2

Clarifying the Connection

By: Bruce Rose

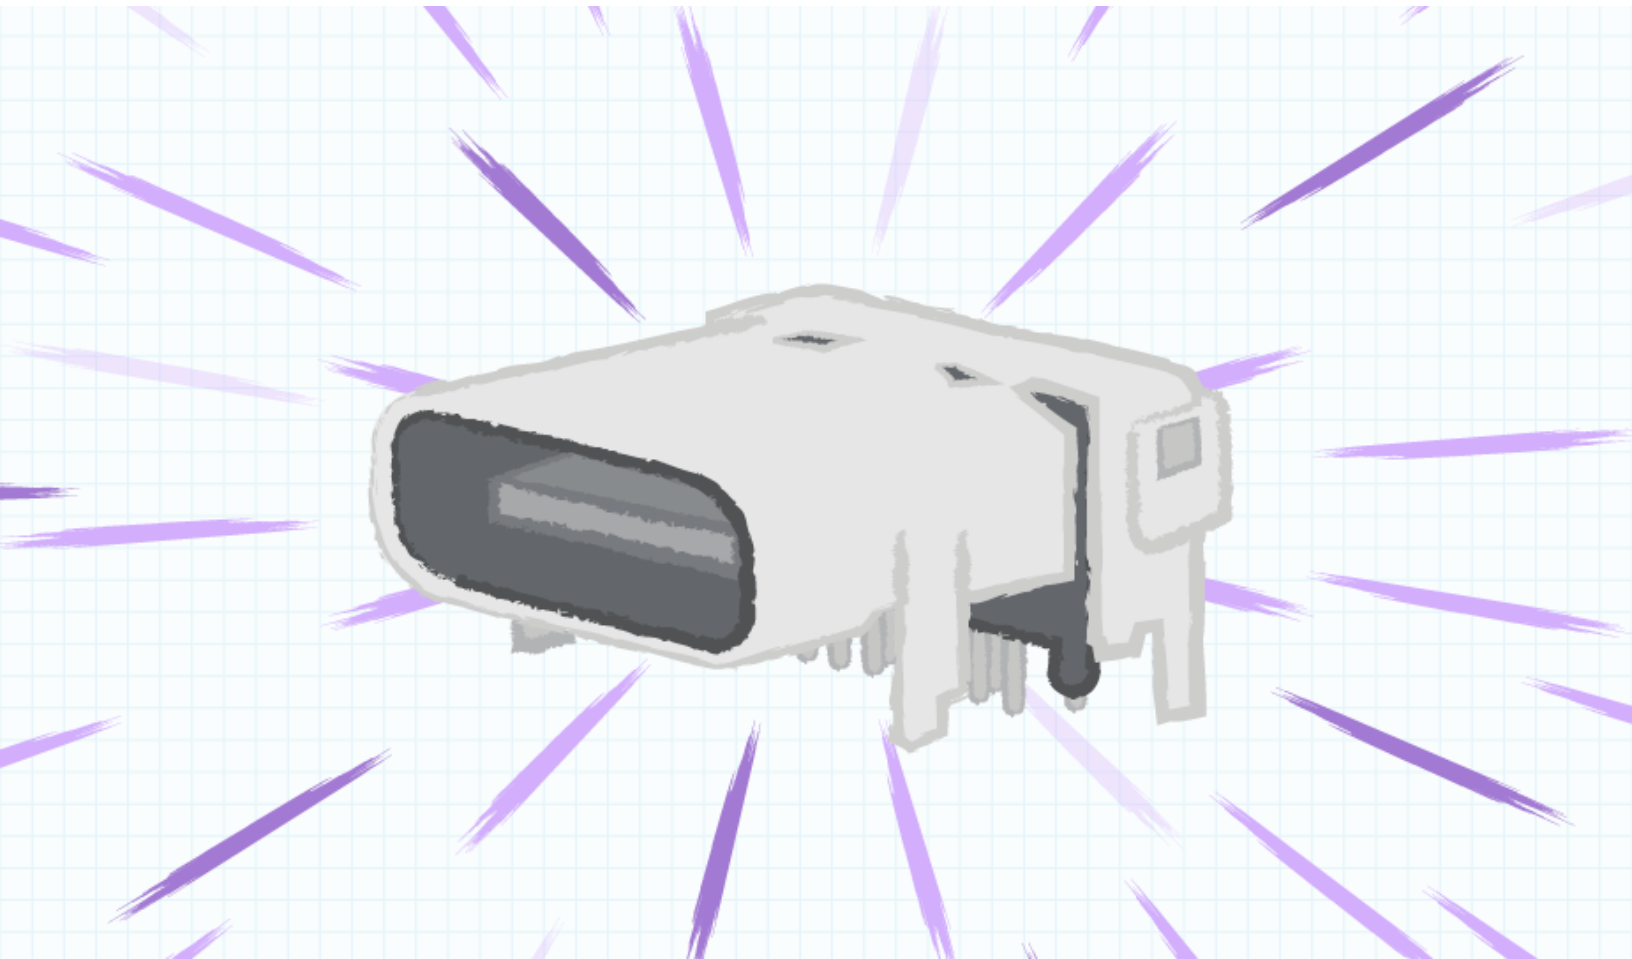

CUI DEVICES

USB standards have existed for many years, evolving and improving as technology needs and capabilities have increased. The USB Implementers Forum (USB-IF) has recently released specifications for the USB Type C connector and USB 3.1 Gen 2 signal standard (also referred to as SuperSpeed+). In the table below one can see the progression of the USB signal standards beginning with USB 1.0 up to USB 3.1 Gen 2 and the various modes and data transfer rates introduced with each. The USB Type C connector also includes many feature enhancements over previous connector standards. Understanding these improvements will allow engineers to utilize this connector and the various signal specifications in the proper manner in order to boost performance in their design.

Release Name	Release Date	Mode	Abbreviation	Gross Data Rate
USB 1.0	January 1996	Low Speed	LS	1.5 Mbit/s (187.5 KB/s)
		Full Speed	FS	12 Mbit/s (1.5 MB/s)
USB 1.1	January 1998	Fixed common issues of USB 1.0. Data rates remained the same.		
USB 2.0	April 2000	High Speed, also Hi-Speed	HS	480 Mbit/s (60 MB/s)
USB 3.0*	November 2008	SuperSpeed	SS	5 Gbit/s (625 MB/s)
USB 3.1 Gen 2	July 2013	SuperSpeed+	SS+	10 Gbit/s (1.25 GB/s)

*USB 3.0 now commonly referred to as USB 3.1 Gen 1

Figure 1:
History of USB releases

MISCONCEPTIONS BETWEEN USB TYPE C AND USB 3.1 GEN 2

Confusion often arises when discussing the relationship between USB Type C connectors and USB 3.1 Gen 2. The USB Type C standard defines only the physical connector while the USB 3.1 Gen 2 standard applies only to the electrical signal. While most system designers will choose to communicate USB 3.1 Gen 2 signals through USB Type C connectors and cables, it is possible to transmit and receive USB 3.1 Gen 2 compliant signals through a connector which does not conform to the USB Type C specification. A product designer can implement such a configuration using the USB 3.1 Gen 2 signal standard and their own proprietary connectors, if they want to keep the system isolated from other systems or to ensure that proprietary hardware is being used.


In a similar fashion a USB Type C connector can be used to transmit and receive signals not conforming to USB signal standards. This implementation benefits from the wide availability and inexpensive cost of USB Type C connectors and cables, but puts the user at risk of connecting the non-conforming proprietary system to a system conforming to the USB 3.1 Gen 2 standard and damaging one or both of the systems.

It should be noted that USB standards also allow for transmitting legacy (pre-USB 3.1 Gen 2) USB signaling configurations using USB Type C connectors and cables. In these configurations no damage will result to the systems, but proper power and data transfer will occur upon the systems negotiating common communications and power configurations.

USB TYPE C ADVANTAGES

The USB Type C connector has been designed to provide a number of advantages when compared to previous generations. Enhancements include a smaller package size, more conductors, higher voltage ratings, higher current ratings and greater signal bandwidths. The reduced size of USB Type C plugs and receptacles allows for use in a wider range of applications where space would have been an issue. In addition the plugs and receptacles can be connected either right-side up or up-side down, allowing for faster and easier insertion of plugs into receptacles.

Figure 2:
Comparing
conductors in USB
Type A, B, and C
connectors

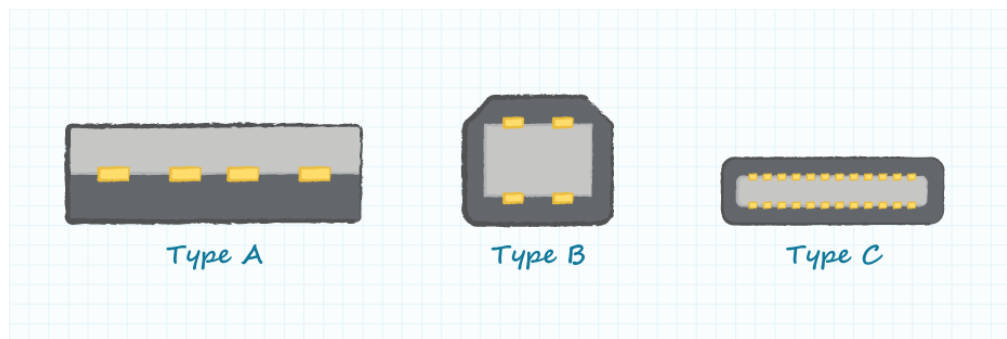

Whereas USB Type A and Type B connectors each specify four or five conductors, USB Type C connectors employ 24 contacts and carry an increased durability rating up to 10,000 insertion and extraction cycles, compared to 1,500 mating cycles for standard USB Type A connectors. There are four power and ground contacts each in a USB Type C connector making it able to aggregately carry 5 A of current. In addition to the higher current rating, USB Type C connectors are also rated up to 20 V between the power and ground pins, allowing for 100 W of power transfer. [The USB Power Delivery \(PD\)](#) specifications provide information regarding the implementation of the higher levels of power delivery available through USB Type C connectors. Just as USB Type C and USB 3.1 Gen 2 are two separately

defined standards, it is important to note that USB Type C and USB PD exhibit the same relationship. Although a USB Type C connector is designed to support the USB PD standard, the device's host controller and cable must also be configured to support the standard.

Figure 3:
USB Power Delivery
specifications

Specification	Maximum Power	Maximum Voltage	Maximum Current
USB 2.0	2.5 W	5 V	500 mA
USB 3.0 and 3.1	4.5 W	5 V	900 mA
USB BC 1.2	7.5 W	5 V	1.5 A
USB Type-C 1.2	15 W	5 V	3 A
USB PD 3.0	100 W	20 V	5 A

Lastly, USB Type C connectors support 10 Gbps of data transfer through each of two data pin pairs. This bandwidth support will further allow for 20 Gbps data transfer rates when both data pin pairs are used as specified in the USB 3.2 standards announced by USB-IF on September 22, 2017.


OPTIMIZING FOR USB 3.1 GEN 2

As stated previously, the USB 3.1 Gen 2 specification defines a set of data and power signals and the characteristics of those signals. However, it does not address the cables to be used in conjunction with the signals. It should also be noted that the cables used to transport the USB 3.1 Gen 2 signals will need to have current, voltage and signal integrity characteristics sufficient to handle and not degrade the USB 3.1 Gen 2 signals. While the USB 3.1 Gen 2 specification supports 10 Gbps communication rates and USB Type C connectors are designed for signal integrity at and beyond those speeds, the length of the cable and quality of the cable construction can both be a factor in limiting communication bandwidth.

USB TYPE C MOUNTING CONFIGURATIONS

Two versions of USB Type C receptacles are available enabling engineers the choice of mounting the connector on the top of the PCB (SMT) or in a routed-out space in the PCB (mid-mount). The SMT version of the receptacle requires the height of the PCB and the connector in the product design. The mid-mount version of the receptacle allows for a more compact design but eliminates the possibility of placing PCB traces under the connector.

Figure 4:
USB SMT and
mid-mount
configurations

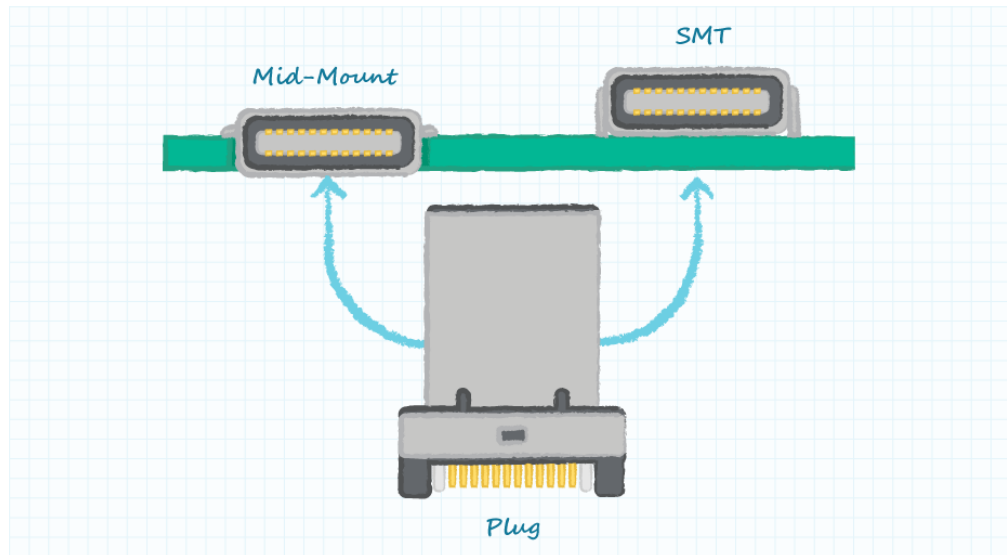

IN CONCLUSION

USB standards have been widely adopted for signals, connectors and cables. The recently released specifications for USB 3.1 Gen 2 and the USB Type C connector enables standardized high speed and high power signal transfer. Conforming USB Type C plugs and receptacles from CUI Devices are designed to support USB 3.1 Gen 2 data transfer rates and also permit communications beyond the present 10 Gbps limit as standards continue to evolve.



[View CUI Devices' entire line of USB Type C plugs and receptacles](#)

LEARN MORE ►