

25ppm, 0.1%, High Precision & High Reliability Resistors




KOA's new RS73-series are ESD transient tolerant high precision and high reliability resistors using thick film technology

With a T.C.R. down to ± 25 ppm and a tolerance as low as $\pm 0.1\%$, the new RS73-series from KOA is ideal for precision designs such as high-accuracy sensing or voltage detection circuits in automotive, industrial and measuring applications, especially where ESD sensitivity is an issue. The ESD tolerance of these parts means that, in certain cases, protection devices, such as varistors etc, can be omitted from the design.

The new RS73-series also features an **excellent long-term stability**.

RS73 Series

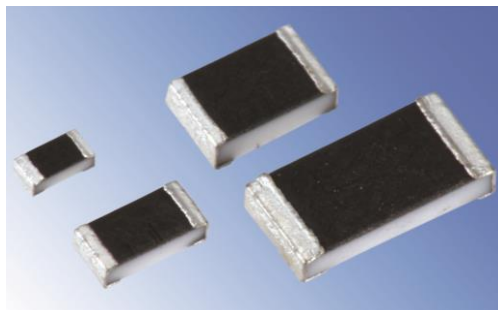

Features

- $\pm 0.1, \pm 0.25, \pm 0.5$ and $\pm 1\%$ tolerances available
- ± 25 ppm/K, ± 50 ppm/K
- $\pm 0.2\%$ long term stability (+85 °C / 1000 h)
- Higher rated power at +85 °C ambient temp.
- ESD stability of thick film resistors
- Ideal for applications where thin film is not suitable
- Anti-Sulfuration type also available (RS73-RT)
- EU-RoHS compliant, AEC-Q200 tested



RS73



RS73_RT

Application Examples

- High precision circuits for automotive and industrial
- Motor control circuits
- AC adapters
- A/D signal conversion
- Switching boards
- Industrial equipment & measurement

Ratings

Operating Temperature Range: -55°C ... +155°C

Type	Size (inch)	Power Rating	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (ppm/K)	Resistance Range E24 • E96*2		
						B: $\pm 0.1\%$	C: $\pm 0.25\%$	D: $\pm 0.5\%$ F: $\pm 1\%$
RS73 (F/G) 1E	0402	0.125 W	+85 °C	+125 °C	F: ± 25 *1 G: ± 50	300 Ω ~ 100 k Ω	300 Ω ~ 1 M Ω	
RS73 (F/G) 1J	0603	0.2 W				10 Ω ~ 1 M Ω		
RS73 (F/G) 2A	0805	0.25 W				10 Ω ~ 3 M Ω	10 Ω ~ 6.8 M Ω	10 Ω ~ 10 M Ω
RS73 (F/G) 2B	1206	0.33 W				10 Ω ~ 5.1 M Ω		

*1 Measurement Temp. +25°C/+125°C: ± 25 ppm/K ambient; Cold T.C.R. -55°C/+25°C: -50/~+25ppm/K ambient *2 Values from E192 series on request. If you use at rated power, keep the condition that the terminal of the resistor is below the rated terminal part temperature and refer to derating curves.

Performance

Parameter	Test Methods	Limit ΔR (% +0.05 Ω)	Typical ΔR (% +0.05 Ω)
Short time overload	Rated voltage x 2.5 for 5sec (Not exceeding max. overload voltage)	± 0.2	± 0.03
Resistance to soldering heat	+260°C ± 5 °C, 10sec ± 1 sec	± 0.2	± 0.1
Rapid change of temperature	-55°C(30min.) / +125°C(30min.), 1000cycles	± 0.2 : 1E (300 Ω \leq R \leq 20k Ω) 1J (10 Ω \leq R \leq 1M Ω) 2A,2B (10 Ω \leq R \leq 10M Ω) ± 0.4 : others	± 0.05 : 1E (300 Ω \leq R \leq 20k Ω) 1J (10 Ω \leq R \leq 1M Ω) 2A,2B (10 Ω \leq R \leq 10M Ω) ± 0.2 : others
High temperature exposure	+155°C ± 3 °C, 1000hrs	± 0.2 : 1E (300 Ω \leq R \leq 10k Ω) 1J (10 Ω \leq R \leq 200k Ω) 2A,2B (10 Ω \leq R \leq 100k Ω) $\pm 0.4 \sim 0.5$: others	± 0.1 : 1E (300 Ω \leq R \leq 10k Ω) 1J (10 Ω \leq R \leq 200k Ω) 2A,2B (10 Ω \leq R \leq 100k Ω) $\pm 0.2 \sim 0.3$: others
Moisture resistance	+40°C ± 2 °, 90~95%RH, 1000hrs 1.5h ON / 0.5h OFF cycle	± 0.2 : 1E (300 Ω \leq R \leq 10k Ω) 1J (10 Ω \leq R \leq 200k Ω) 2A,2B (10 Ω \leq R \leq 10M Ω) $\pm 0.4 \sim 0.5$: others	± 0.04 : 1E (300 Ω \leq R \leq 10k Ω) 1J (10 Ω \leq R \leq 200k Ω) 2A,2B (10 Ω \leq R \leq 10M Ω) ± 0.08 : others
Rated load / endurance	+85°C ± 2 °C or rated terminal part temperature ± 2 °C, 1000hrs 1.5h ON/0.5h OFF cycle	± 0.2 : 1E (300 Ω \leq R \leq 20k Ω) 1J (10 Ω \leq R \leq 1M Ω) 2A,2B (10 Ω \leq R \leq 10M Ω) ± 0.4 : others	± 0.05 : 1E (300 Ω \leq R \leq 20k Ω) 1J (10 Ω \leq R \leq 1M Ω) 2A,2B (10 Ω \leq R \leq 10M Ω) ± 0.2 : others

Specification given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. Contact our sales representatives before you use our products for applications including automotive, medical equipment and aerospace equipment. Malfunction or failure of the products in such applications may cause loss of human life or serious damage.

Our privacy policy in its newest form is available at <http://koaeurope.de/privacy-policy/>